



### Installation Instructions

## JLT 2015-17 Dodge Charger SRT / Hellcat / Daytona Splash Guards

Thank you for purchasing our product. We hope you are satisfied with the look. Take your time and it will be a smooth install.

Please review complete instructions prior to installing.

Step#	
1	Verify you have all of the following parts depending on what you ordered included in the kit: Front: (2) Front splash guards, (6) Push Pins, (2) U Channel pieces Rear: (6) Push Pins
2	Remove the 3 push pins in each wheel well of the car using a flat screwdriver to pry out the center.
3	CLEAN ALL DIRT FROM ALL 4 ATTACHMENT AREAS.
4	FRONT: Insert top push pin into splash guard and insert through the fender and into the liner. You may need to pull the liner tight to get it to lock on. Insert remaining pins and slide on U CHANNEL to grab the fender and guard.
5	REAR: Insert bottom push pins into splash guard and insert through the bumper and lock. Insert remaining pins.

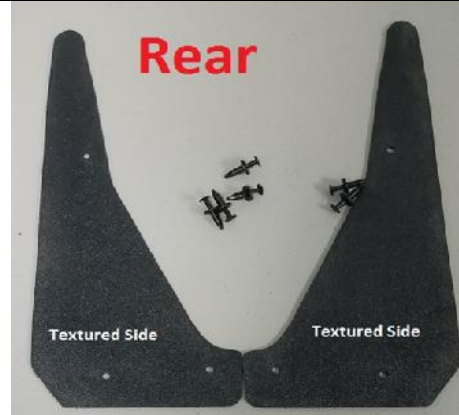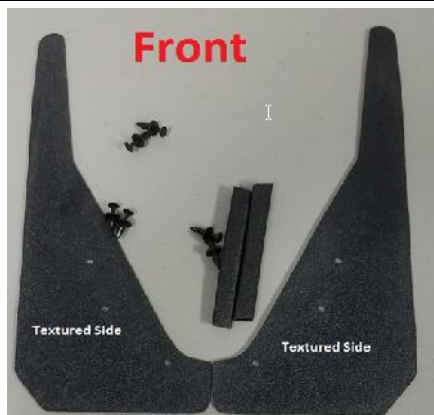

Thanks for the business. If you have any questions, please e-mail [info@JLTtruecoldair.com](mailto:info@JLTtruecoldair.com) or call 757-335-1940. Our hours are Monday-Friday. 8:00am – 5:00pm Eastern Time.

**Warranty:** JLT Performance Inc. will repair or replace any part of their product found upon our inspection to be defective in workmanship or material within 1 year from the purchase date for the original purchaser.

**Disclaimer:** JLT Performance Inc. makes no warranties whatsoever, expressed or implied, oral or written to any purchasers, except the warranty above. JLT Performance Inc. hereby specifically excludes from any implied warranty of merchantability or implied warranty of incidental, secondary, or consequential damages of any kind whatsoever. All purchasers and users of products manufactured by JLT Performance Inc. agree to hold harmless and indemnify JLT Performance Inc. from any and all claims arising from their use. Failure to receive notice of any or the limitations contained in this disclaimer shall not serve to extend liability to JLT Performance Inc. for any claims arising out of use of its products.

**Return Policy:** All returns will be subject to a 10%-25% restocking fee. Please visit [www.JLTtruecoldair.com](http://www.JLTtruecoldair.com) for complete return policy.