


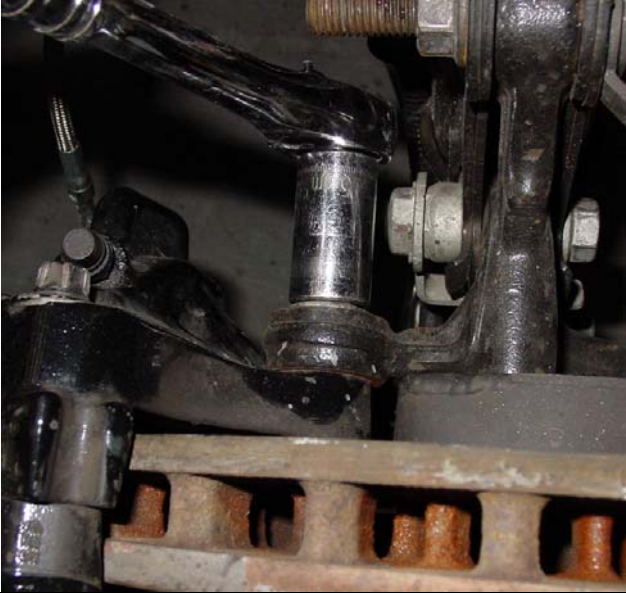


Installation Instructions
JLT Brake Cooling kit (2005-09 Mustang GT, Shelby GT, California Special)
#JLTBCK-FM05

Thank you for purchasing our product. Take your time and it will be a smooth install.

Please review complete instructions prior to installing.

Step#	
1	Verify you have all of the following parts included in the kit: (2) JLT Grille Bezels, (2) Brake Duct Hoses, (6) Zip ties, (2) JLT backing plates (4) #40 hose clamps
2	Gather all of the following tools needed for the installation: Jack, jack stands, lug wrench, 5/16 or 8mm nut driver, 7/32 socket, 15mm socket, 13mm socket and ratchet, drill, 2 1/2" hole saw, tape measure, sharpie or marker
3	Jack car up and secure on jack stands
4	Remove both front wheels
5	Remove (2) 15mm bolts and remove brake caliper 
6	Remove stock backing plates (3 13mm bolts) Replace with JLT backing plates using 2 bolts. You can put 3 rd back in hole and tighten or save it. 

7

Now you need to mark the center of your grille to be drilled. Measure 1.5" down from the top and 4 ¼" from the inside edge, this is your center. Use your 2 ½" hole saw and drill this out and snap in the JLT Grille Bezels.



8


Put the clamps on the hose ends, install on grille bezels mount and tighten.



9

Attach other end to JLT backing plates and secure hose to frame loop and sway bar with Zip ties as shown.



<p>10</p>	<p>While still jacked up, be sure to mount wheel and check clearance between hose and tire. Turn the wheel full turns left and right.</p> 
<p>11</p>	<p>Reassemble brakes and wheels in reverse and you are done. Don't forget to re torque your lug nuts after a few miles of driving. We suggest 100 ft lbs.</p>



Thanks for the business. If you have any questions, please e-mail Jay@JLTtruecoldair.com or call 757-335-1940. Our hours are Monday-Friday. 8:00am – 5:00pm Eastern Time.

Warranty: JLT Performance Inc. will repair or replace any part of their product found upon our inspection to be defective in workmanship or material within 1 year from the purchase date for the original purchaser.
Disclaimer: JLT Performance Inc. makes no warranties whatsoever, expressed or implied, oral or written to any purchasers, except the warranty above. JLT Performance Inc. hereby specifically excludes from any implied warranty of merchantability or implied warranty of incidental, secondary, or consequential damages of any kind whatsoever. All purchasers and users of products manufactured by JLT Performance Inc. agree to hold harmless and indemnify JLT Performance Inc. from any and all claims arising from their use. Failure to receive notice of any or the limitations contained in this disclaimer shall not serve to extend liability to JLT Performance Inc. for any claims arising out of use of its products.
Custom Paint Disclaimer: All custom paint jobs are done by JLT Performance Inc. Every job is different and done by hand. By ordering a custom paint job, you accept this fact and cannot hold JLT Performance Inc. liable for the end result not being exactly what you had in your mind.
Return Policy: All returns will be subject to a 10%-25% restocking fee. Air Filters will not be accepted for return unless they are in original plastic sealed bag. Please visit www.JLTtruecoldair.com for complete return policy.